

Area Series (Large)

The OLA1 Large Series is a stylish aerodynamic area luminaire that fits within today's accepted design form factors. Excellent optical performance is achieved with Lumileds brand LED's and engineered discrete optics. LED life is assured through efficient thermal coupling and dissipation via a durable, pressure die cast, low-copper alloy, aluminum housing. Engineered to last, all gaskets are anti-UV, anti-aging with no harmful out-gassing. All models come standard with a universal pole mount bracket or an optional wall surface box. Luminaires are available with a number of options including alternate CCT choices, finishes, photocells and occupancy sensors.



FEATURES

- LED Brand: Lumileds
- Color Temperatures: 4000K & 5000K (Other CCT's are available upon request)
- CRI: 70
- Lumen Maintenance: L70 = 50,000 hours
- Full Cutoff (meets IDA criteria)
- Operating Temperature: -40 °C (-40 °F) to 40 °C (104 °F)
- Durable All Aluminum Pressure Die Cast Housing
- Long Life Durable Powder Coat Finish (Custom colors are available upon request)
- IP65 Rated (wet listed)
- Mounting: Universal Round or Square Pole, Wall Surface Box

ELECTRICAL SPECIFICATIONS

- Power Input: 120-277V (347-480V Optional)
- Power Factor: >0.95
- THD: < 15%
- Surge Protection: 10 kV
- Control Options: 0-10V Dimming standard (Photocell and Occupancy Sensors Optional)

TESTS & CERTIFICATIONS

- ETL (UL 1598)
- CSA (C22.2 No.250.0)
- RoHS Compliant
- Design Lights Consortium (Premium)



WARRANTY

- 10-Year Warranty (parts or replacement)

PERFORMANCE SPECIFICATIONS

Distribution	Model / Wattage	Lumens		Bug Rating		
		4000K	5000K	B	U	G
Type 2	OLA1-180	23,760	24,120	4	0	2
	OLA1-230	30,360	31,050	4	0	2
	OLA1-300	39,900	40,800	4	0	3
	OLA1-360	45,000	46,080	5	0	3
Type 3	OLA1-180	24,571	25,112	3	0	3
	OLA1-230	31,049	31,740	4	0	3
	OLA1-300	40,801	41,701	4	0	4
	OLA1-360	46,190	47,520	4	0	4
Type 3L	OLA1-180	23,760	24,120	4	0	4
	OLA1-230	30,360	31,049	5	0	4
	OLA1-300	39,902	40,800	5	0	4
	OLA1-360	45,000	46,080	5	0	5
Type 3R	OLA1-180	23,760	24,120	4	0	4
	OLA1-230	30,360	31,049	5	0	4
	OLA1-300	39,900	40,800	5	0	4
	OLA1-360	46,929	46,081	5	0	5
Type 4	OLA1-180	23,025	23,384	3	0	3
	OLA1-230	29,415	29,895	3	0	4
	OLA1-300	38,094	39,027	3	0	4
	OLA1-360	46,910	45,337	4	0	4
Type 4L	OLA1-180	23,760	24,120	4	0	4
	OLA1-230	30,360	31,050	4	0	4
	OLA1-300	39,900	40,800	5	0	5
	OLA1-360	45,000	46,080	5	0	5
Type 4R	OLA1-180	23,760	24,120	4	0	4
	OLA1-230	30,360	31,050	4	0	4
	OLA1-300	39,900	40,800	5	0	5
	OLA1-360	45,000	46,080	5	0	5
Type 5	OLA1-180	22,573	22,917	5	0	4
	OLA1-230	28,844	29,283	5	0	5
	OLA1-300	37,622	38,195	5	0	5
	OLA1-360	45,146	45,834	5	0	5

Voltage (V)	Current (A)			
	180W	230W	300W	360W
120	1.50	1.92	2.50	3.00
208	0.87	1.11	1.44	1.73
240	0.75	0.96	1.25	1.50
277	0.65	0.83	1.08	1.30
347	0.52	0.66	0.86	1.04
480	0.38	0.48	0.63	0.75



Area Series (Large)

ORDERING INFORMATION

EXAMPLE: OLA1-230-UNVL-50-4-SQ-BZ-PR-TL12

SERIES	WATTAGE	VOLTAGE	COLOR TEMP	DISTRIBUTION	MOUNTING	FINISH	CONTROL / OPTIONS
OLA1 = Optec LED Area Light	180 = 180W 230 = 230W 300 = 300W 360 = 360W	UNVL = 120-277V UNVH = 347-480V	30 = 3000K ⁴ 40 = 4000K 50 = 5000K	2 = Type 2 3 = Type 3 3L = Type 3 Left 3R = Type 3 Right 4 = Type 4 4L = Type 4 Left 4R = Type 4 Right 5 = Type 5	SQ = Square Pole ² RD = Round Pole ² WM = Wall Mount ^{1,2} TA = Tenon Adapter ²	WH = White BZ = Dark Bronze BL = Black NA = Natural Aluminum CC = Custom Color	OS = Occupancy Sensor ³ PR = Photocell Receptacle PR3 = Photocell Receptacle 3-pin PR5 = Photocell Receptacle 5-pin PR7 = Photocell Receptacle 7-pin SF = Single Fuse (120V, 277V, 347V) DF = Double Fuse (220V, 240V, 480V) WCS = Wireless Control (Synapse) ⁴ HS = House Side Shield ⁵ TLSC = Twist Lock Shorting Cap


1 - WM option requires SQ pole mount bracket.
2 - For details, reference accessory data sheet.
3 - OS = Wattstopper FSP211, for details please reference Wattstopper data sheets.
4 - WCS = Wireless Control (Synapse), contact factory for details.
5 - HS = Shipped separately.

PHOTOMETRIC PERFORMANCE


Isofootcandle plots = OLA1 230W model in 5000K CCT @ 40' mounting height. Distances are in units of mounting height.

LEGEND


	0.1 fc
	0.5 fc
	1.0 fc
	5.0 fc




230W (Type 2) Plot



230W (Type 3) Plot





230W (Type 4) Plot



230W (Type 5) Plot

Published luminaire photometric testing performed to IESNA-79-08 standards

DIMENSIONS, WEIGHTS & EPA

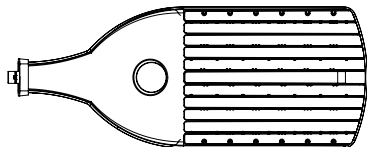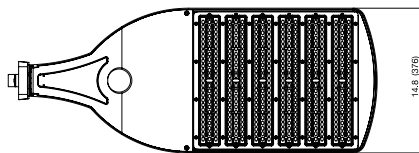

Wattage	180W	230W	300W	360W
Length (in" / mm)	35.67" / 906	35.67" / 906	35.67" / 906	35.67" / 906
Width (in" / mm)	14.8" / 376	14.8" / 376	14.8" / 376	14.8" / 376
Height (in" / mm)	7.83" / 199	7.83" / 199	7.83" / 199	7.83" / 199
Weight (lbs / kg)	27.8 / 12.6	28.2 / 12.8	29.3 / 13.3	30.4 / 13.8

Wattage	Effective Projected Area (EPA)				
180	0.95	1.92	1.75	2.70	3.50
230	0.95	1.92	1.75	2.70	3.50
300	0.95	1.92	1.75	2.70	3.50
360	0.95	1.92	1.75	2.70	3.50